
The magnetic rails are tools that are installed on the backside of belts to convey various items such as products and press scraps to assist such conveyance. These rails are used to improve the work efficiency.

[Application]

Recommended for such operations as vertical and inclined conveyance of filled cans and empty cans, conveyance of press scraps and chips, leak inspection of aerosol cans and belt conveyance in manufacturing processes.


- ■Two types, permanent magnetic rails and electromagnetic rails are available according to operations.
- Easy handling of products and goods. No fixtures are necessary and products and goods to convey are not damaged.


Vertical conveyance







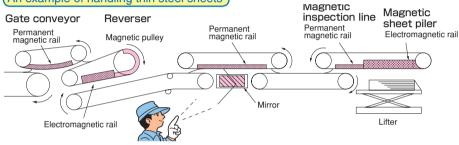




Reject gate conveyor

Sorter

- [Application]

 Can be used in lines to accept and reject inspected sheets.
 - The flow of sheets can be branched to two directions.




Backing conveyor

Reverser

[Application]


Can be used in such operations as turning sheets or reversing the sheet flowing directions to inspect the backside of thin steel sheets and to shorten the drying line in painting shops and for alignment machines.



Sheet piler

Steel sheet piler

[Application] Sheets can be piled smoothly by use of a magnetic conveyor.




Permanent magnetic rail

KRA-A permanent magnetic rail

KRA-B permanent

magnetic rail



A magnetic plate is mounted inside a stainless steel case. Can be easily connected to the poles of a permanent magnetic pulley. Used for elevator

[mm(in				[mm (in)]
Model	L	L ₁	L ₂	Mass
KRA-A 500	500	300	80	9.5kg/
	(19.6)	(11.8)	(3.15)	21 lb
KRA-A1000	1000	600	200	19.0kg/
	(39.4)	(23.6)	(7.87)	41 lb

type magnetic conveyors.


Poles of a magnet are projecting to the inside of a stainless steel case. The holding power via a belt is strong. Used for magnetic conveyors that convey thin

Į I I I I I				11(111/3
Model	L	L ₁	No. of Taps	Mass
KRA- 1050B	500 (19.6)	300 (11.8)	4	13kg/ 29 lb
KRA-10100B	1000 (39.4)	270(10.6) ×3	8	27kg/ 60 lb

steel sheets in the inverted posture.

Electromagnetic rail


KRA-C type electromagnetic rail



Used for magnetic conveyors that receive steel sheets that have been conveyed in the inverted posture by a piler. Rating: 180 VDC, continuous

				[mm (in)	
Model	Current	L	L ₁	Mass	
KRA-C 500	0.52A	500 (19.6)	300 (11.8)	25kg/ 55 lb	
KRA-C1000	1.01A	1000 (39.4)	270 (10.6) ×3	50kg/ 110 lb	

KRA-D electromagnetic rail with rollers



An electromagnetic rail having rollers. Used to prevent drooping of steel sheets after shearing machines.

■Rectifier RH-MW type Input 200 VAC, single-phase output 0-180 VDC,

5 A/ TO A [mr				nm (in,
Model	L	L ₁	No. of Taps	Mass
KRA-D50	550 (21.6)	350 (13.7)	180 VDC, 90W	10kg/ 22 lb
KRA-D75	800 (31.5)	500 (19.6)	180 VDC, 148W	15kg/ 33 lb

Mounting tap M10, depth 12