

# MEASURING TOOL HOLDERS

## Model ME-BW WATERPROOF LED LIGHT STAND

Light part waterproofed

Parts available individually


### LED light illuminates a target place brightly!

[Application]

Recommended not only for field work but also for various situations such as precision machining, inspection, spotlighting, DIY work and outdoor.

[Features]

- The high brightness LED is equipped with a 2-stage brightness switchover function, which allows selection of brightness according to situations.
- The flexible tube type allows the lighting direction to be set as desired. The mechanical lock type is compact and can be locked quickly for use in a limited space.
- The LED light can be removed from the holder and carried for DIY work and during night.

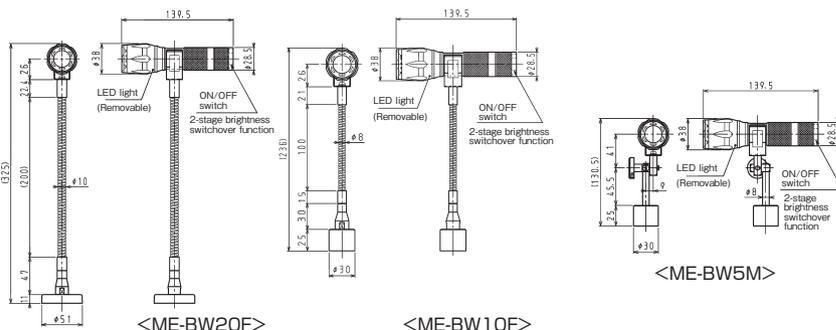


### Useful in various scenes!

Assembly/inspection



Work in dark places

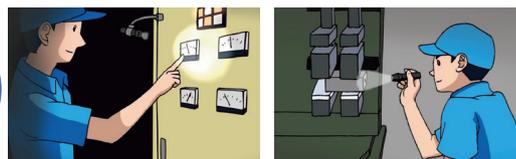

DIY/outdoor



In emergency



[mm (in)]

Model	Type	Holding Power	Height	LED Light					Mass
				LED	Illuminance	Battery	Battery Life	Waterproof level	
ME-BW10F	Standard type	150N (15kgf)	236 (9.29)	High brightness LED 1 pc used	Approx. 2000 lx ※1	AAA battery × 3 pcs ※2	Continuous on Approx. 5 hours	Equivalent to IP67 ※3	0.37kg/0.81 lb
ME-BW20F	Long type	100N (10kgf)	325 (12.7)						0.4kg/0.88 lb
ME-BW5M	Mechanical lock type	150N (15kgf)	130.5 (5.13)						0.3kg/0.80 lb

※1 Initial value under the condition of distance 500 mm, new alkaline battery used. ※2 The battery is not included.

※3 A level at which no dust enters and no water enters when immersed in water for 30 minutes. Waterproofed is the light part only.

## Model ME OUTDOOR TYPE MAGNETIC LAMP STAND

[Application]

Most suitable for area lighting during outdoor work. Small and compact, but the strong magnetic holding power enables this stand to be mounted not only on a vertical surface, but on an inclined and vertical surfaces easily.

[Features]


- The stand can be installed in any place, removed and relocated.
- The reflective cover is of 360° drain construction that does not allow deposition of water in any direction. (LED type)
- With the holding position remaining unchanged, only the lighting direction can be changed as desired.
- The protective guard reduces a risk of breakage if the stand falls.
- The work lamp is of highly safe double insulation construction requiring no grounding. (LED type)

[mm (in)]



<ME-5RA>

<ME-5RA-LED>

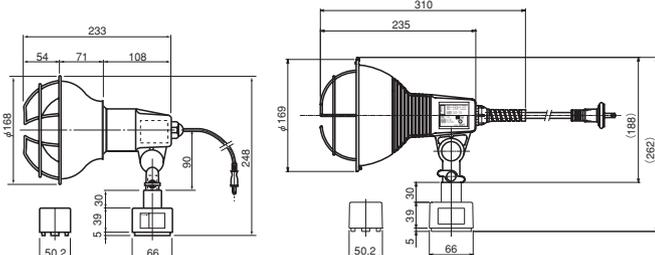

Model	Holding Power	Magnet ON/OFF	Height	Cord Length	Bulb Capacity	Accessory Bulb	Mass
ME-5RA	1000N (100kgf)	Not provided	248 (9.76)	5m (196.8)	100VAC 200W	Provided	2kg/4.4 lb
ME-5RA-LED	1000N (100kgf)	Not provided	262 (10.3)	5m (196.8)	100VAC 20W	Not provided	2.4kg/5.29 lb

※ The holding power is based on a test piece of SS400, 10 mm thick, ground surface.

※ The power plug is of tracking resistance type.

※ ME-5RA comes with HATAYA Model RS-200WH (RF110V180WH) base 26.

### LED bulb dedicated to ME-5RA-LED

Model	Bulb Capacity	LED Life	Luminous Flux	Beam Angle	Mass
ME-5RA-LED Exclusive LED bulb	100 VAC 200 W	Approx. 40,000hours	2400lm	60°	0.315kg /0.694 lb

※ The LED bulb included with ME-5RA-LED is a dedicated bulb. When you require LED bulbs, please contact the nearest dealer or our sales office.